


NAMIBIA

Issued on 04/19/2024 - Rev. No. 1 of 04/19/2024

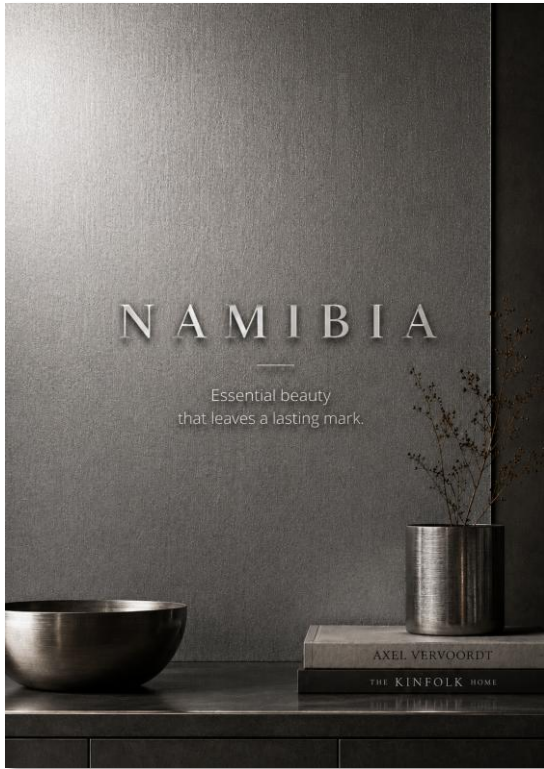

NAMIBIA

THREE-DIMENSIONAL DECORATIVE COATING
FABRIC-EFFECT TEXTURED FINISH

Advanced decorative coating based on nano-resins, selected crystals and metallic pigments, designed to create seamless surfaces with high aesthetic value and performance.

Soft-touch three-dimensional texture, highly resistant to chemical agents and suitable for interior and exterior applications.

- HIGH PERFORMANCE**
Resistant to detergents and sanitizing agents
- SEAMLESS SURFACES**
Continuous surfaces without joints
- BREATHABLE**
Permeable to water vapor
- HYGIENIC**
Resistant to mold and bacteria
- SCRATCH-RESISTANT AND FLEXIBLE**
High durability and resistance
- ECO-FRIENDLY**
Very low VOC content
Formaldehyde- and APEO-free



1 ELEGANT OPEN SPACE – CHROME
Seamless surfaces for contemporary architecture.



2 BEDROOM – PURE GOLD
Visual comfort and advanced material depth.



3 KITCHEN – CHROME
Resistenza and hygiene for technical environments.



4 DETAIL WALL – PURE GOLD
Three-dimensional texture that enhances the material.

THREE-DIMENSIONAL FABRIC EFFECT
Unique depth and material richness

CHEMICAL AND SANITIZING RESISTANCE
Ideal for high-traffic areas

ANTIBACTERIAL AND ANTI-MOLD
Healthy and protected environments

BREATHABLE
Permeable to water vapor

ECO-SUSTAINABLE
Very low VOC content
Free from formaldehyde and APEO

EASY AND FAST APPLICATION
2 coats ready to use

TECHNICAL DATA
Theoretical coverage ~ 10 m²/L
Application 2 coats
Drying time 24 h (+20°C)
pH > 9
VOC Very low
Wash resistance > 50.000 cycles

THE FINISHES
 CHROME PURE GOLD

NAMIBIA

DESCRIPTION

From the incredible need to create beauty and increasingly durable products for the luxury market, the new Namibia finish was born. It is making a strong entrance into the international interior design market. Highly resistant to sanitizing and disinfecting products, suitable for both interior and exterior use, the brand new finish from Nikkolor Italia features a completely three-dimensional texture and a soft touch, reproducing the absolute perfection of fine fabrics.

COMPOSITION

- ✓ An innovative blend of nanoresin, selected crystals, metallic pigments, and additives.
- ✓ Thanks to its technical and chemical characteristics, the product is scratch-resistant and flexible, easy and quick to apply, non-toxic, non-yellowing, permeable to water vapor, and resistant to fungi and bacteria.
- ✓ Namibia is an environmentally sustainable and advanced product, containing no added *formaldehyde or **APEO, and with a very low VOC content.

APPLICATIONS

- ✓ Ideal for covering interior walls and ceilings for high-end design and renovations in public and private spaces, shopping centers, shops, bars, villas, and residences.
- ✓ The unique feature of the completely seamless design allows for seamless solutions, a true innovation in modern architecture, with a refined finish capable of creating a fabric effect, lending three-dimensionality to the surfaces it covers.

PREPARATION AND APPLICATION OF NAMIBIA LINEN THREADS

- ✓ Substrates must be dry, solid, and free of dust, paint, wax, oil, and loose particles.
1. Apply a single coat of NK Primer evenly over the entire surface to be treated using a short-haired roller and a brush.
 2. Let dry for 12 hours (+20°C).
 3. Apply a first coat of Namibia over approximately 2 m² using a short-haired roller. Using a doormat pad, draw the product vertically while it is still wet.
 4. Let dry for 12 hours (+20°C).
 5. Apply a second coat of Namibia, proceeding as for the first coat.
 6. Let dry for 24 hours (+20°C).

PREPARATION AND APPLICATION OF NAMIBIA CASHMERE

- ✓ Substrates must be dry, solid, and free of dust, paint, wax, oil, and loose particles.
1. Apply a single coat of NK Primer evenly over the entire surface to be treated using a short-haired roller and a brush.
 2. Let dry for 12 hours (+20°C)
 3. Apply a first coat of Namibia over approximately 2 m² using a short-haired roller and immediately smooth the treated surface using a stainless-steel trowel.
 4. Let dry for 12 hours (+20°C).
 5. Apply a second coat of Namibia, proceeding as for the first coat.
 6. Let dry for 24 hours (+20°C).

NAMIBIA

TECHNICAL DATA

- ✓ Appearance: Creamy;
- ✓ Specific weight: 1.100 +/- 5% kg/L;
- ✓ Composition: Nano resin, selected crystals, metallic pigments, additives;
- ✓ Colors: Chrome and Pure Gold;
- ✓ Viscosity at +23°C: ≈ 5500 cps ± 5% G6 RPM 100 at 25°C;
- ✓ pH: > 9.00;
- ✓ VOC classification: 8.6 g/L;
- ✓ Coverage: 10 m²/L depending on the type of application and substrate absorption;
- ✓ Dilution: Ready to use;
- ✓ Use temperature: +10°C and +30°C;
- ✓ Drying: Touch dry 2 hours, thoroughly dry 24 hours at 20°C;
- ✓ Application: Spalter brush;
- ✓ Tool cleaning after use: Water;
- ✓ Packaging: 1 L;
- ✓ Cleaning instructions: Clean with a damp microfiber cloth.
- ✓ Storage: Store in tightly closed original packaging in a dry place between +5°C and +30°C.
- ✓ Washing resistance: Resistant to washing > 50,000 cycles, Gardner UNI 10795 UNI 10560.
- ✓ Water vapor permeability: High, UNI 10795 UNI EN ISO 7783-2.
- ✓ Alkali resistance: UNI 10795.
- ✓ Dirt Pickup: Low UNI EN 10792.

OTHER INFORMATION

- ✓ It is recommended to avoid direct contact with highly aggressive substances, such as strongly acidic or basic substances and strongly oxidizing substances (e.g., hair dyes), which can alter the color of the flooring.
- ✓ Vulcanized plastic materials with a high plasticizer content (e.g., tires) may mark the floor if left in prolonged contact with the flooring.
- ✓ The photographic images in the catalog and on the website, as well as the colors shown in the samples, are purely indicative.
- ✓ Use materials from a single production batch for each project.

MAIN CHARACTERISTICS

- ✓ Store in a dry, dry place, away from sunlight.
- ✓ Do not apply on dusty surfaces.
- ✓ Do not apply on wet surfaces.
- ✓ Do not apply on frozen surfaces.
- ✓ Do not apply on still-damp surfaces and repairs.
- ✓ Do not apply in strong sunlight (outdoor application).
- ✓ Do not apply in strong wind (outdoor application).
- ✓ Do not apply in rain (outdoor application). (Exterior)
- ✓ Make sure the temperature does not drop below +10°C before application.
- ✓ Do not apply where rising damp or infiltration has been confirmed.
- ✓ Consult the local weather forecast (exterior application).
- ✓ Properly cover fixtures, doors, etc. before application.

WARNINGS

- ✓ Product for professional use. Follow all national standards and regulations.

NAMIBIA

- ✓ Apply when the substrate temperature is above +10°C.
- ✓ Apply to permanently dry substrates.
- ✓ Protect from direct sunlight and drafts for the first 6 hours.
- ✓ Do not apply to dirty or loose surfaces.
- ✓ Dispose of in accordance with applicable regulations.
- ✓ Materials exposed to temperature changes (due to transportation, storage, construction site, etc.) can cause substantial changes to the product (e.g., crystallization, partial hardening, fluidification, accelerated or delayed curing).
- ✓ In most cases, restoring the products to optimal conditions will also restore their original characteristics.
- ✓ Protect surfaces and objects in the application area from accidental contact.
- ✓ If necessary, request the safety data sheet or contact Nikkolor Italia Technical Customer Service at +39 333 861 8963.
- ✓ www.nikkolor.net

Data measured at +20°C, 65% RH, and no ventilation. They may vary depending on specific construction site conditions: temperature, ventilation, and substrate absorbency. This information is current as of January 2026 and may be subject to additions and/or changes over time by Nikkolor Italia s.r.l. For any such updates, please consult the website www.nikkolor.net.

Nikkolor Italia s.r.l. is therefore responsible for the validity, timeliness, and currency of its information only if taken directly from its website. The technical data sheet is prepared based on our best technical and application knowledge. However, as we cannot directly influence construction site conditions and the execution of the work, it represents general information that does not bind our company in any way. We therefore recommend a preliminary test to verify the product's suitability for the intended use.

