


# MARMOMETAL

Issued on 12/01/2024 - Rev. No. 1 of 12/01/2024

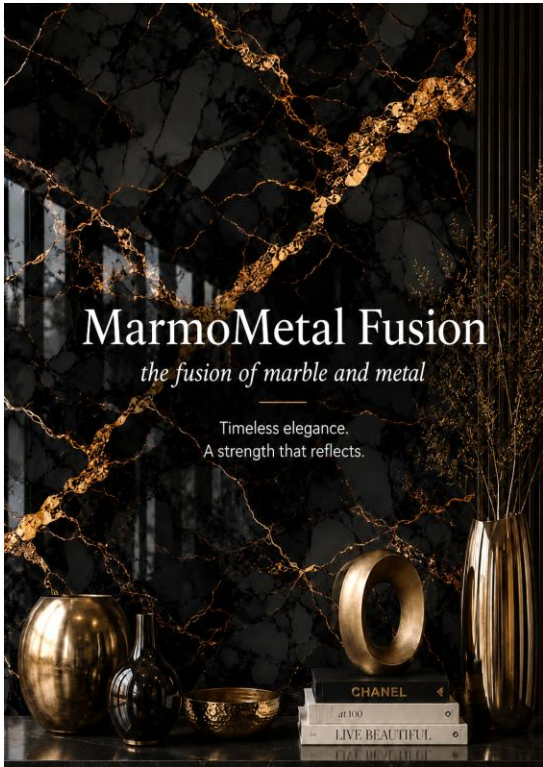

## MarmoMetal Fusion

*the fusion of marble and metal*

Timeless elegance.  
A strength that reflects.




## MARMOMETAL

CONTINUOUS DECORATIVE COATING  
MARBLE AND METAL EFFECT  
FOR HIGH-END SURFACES

**JOINTLESS SURFACES**  
REALISTIC MARBLE-METAL EFFECT  
CONTEMPORARY ARCHITECTURAL AESTHETIC

AVAILABLE FINISHES



MARMO INCISO    MARMO FUSION    MARMOMETAL BRONZO    MARMOMETAL STAGNO    MARMOMETAL RAME



AUTHENTIC MARBLE-METAL EFFECT    CONTINUOUS SURFACE WITHOUT JOINTS    HIGH RESISTANCE AND DURABILITY    IDEAL FOR RESIDENTIAL AND COMMERCIAL SPACES



**MARMO INCISO**  
Mablex Mirror Black




**MARMO FUSION**  
Mablex Mirror Black



**MARMOMETAL BRONZO**  
Mablex Mirror Black




**MARMOMETAL STAGNO**  
Mablex Mirror Black

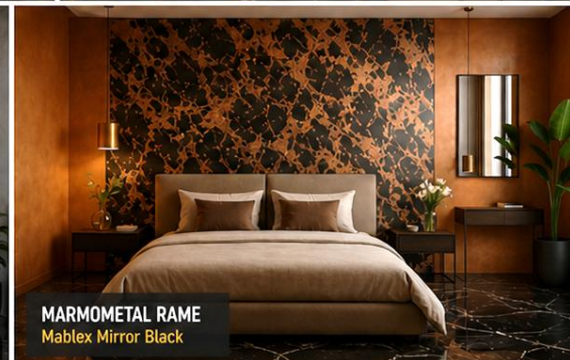

**MARMOMETAL RAME**  
Mablex Mirror Black

AVAILABLE COLOURS



GOLD    BRONZE    COPPER    TIN



CONTINUOUS SURFACE WITHOUT JOINTS



REALISTIC MARBLE-METAL EFFECT



HIGH RESISTANCE OVER TIME



SUITABLE FOR RESIDENTIAL AND COMMERCIAL SPACES

**NIKKOLOR®**

ITALY

www.nikkolor.net

# MARMOMETAL

## DESCRIPTION

The extraordinary creativity and emotional impact of Italian design blend with the mastery of timeless tradition, giving rise to a new series of warm, bold shades that reflect luxury and elegance. The chemical composition created and developed in our laboratories, composed primarily of non-metallic alloys, recycled nanoresins, and fluid zirconium, represents a technological leap never achieved before. Available in four different versions: tin, brass, bronze, and copper.

## FIELDS OF USE

- ✓ The MarmoMetal decorative effect is achieved using Marbled Mirror and ArchiMetal.
- ✓ The combination of the two products develops excellent adhesion and flexibility, maintaining both color and appearance over time.
- ✓ Its innovative formulation is obtained using some of the finest raw materials, which provide excellent mechanical properties, remarkable chemical resistance, and an effective barrier to mold and bacteria growth.
- ✓ Perfect for residential spaces, shops, showrooms, hotels, and contract environments where a strong and refined visual impact is desired.

## FEATURES

- ✓ Realistic appearance of polished marble and liquid metal
- ✓ Seamless, seamless surface
- ✓ High resistance and durability
- ✓ Can be applied to interior and exterior walls, furniture, and decorative panels.

## SUBSTRATE PREPARATION

- ✓ Substrates must be dry, solid, and free of dust, paint, wax, oil, and loose particles.
1. Apply a single coat of Primer NK evenly over the entire surface to be treated using a short-haired roller and a brush.
  2. Let the product dry for 24 hours (+20°C).

## PREPARATION

- ✓ Pour 10 ml of Carbon Black dye into the paint. 500g in a 2.5-liter container of Marbled Mirror and mix using an electric mixer with a whisk attachment until a smooth, lump-free paste is obtained. Let the product rest for a few minutes.
- ✓ ArchiMetal is made up of two components. Pour the "Comp B" metal powder in small doses into the "Comp A" and mix using an electric mixer with a whisk attachment until a smooth, lump-free paste is obtained. If necessary, add drinking water until a soft paste is obtained.

## APPLICATION

1. Apply a first coat of Marbled Mirror using a steel trowel.
2. Let it dry for 12 hours (+20°C).
3. Apply a second coat of Marbled Mirror over approximately 2 m<sup>2</sup>. Go back and smooth the surface until it is smooth and level by tilting the stainless-steel trowel.
4. Let it dry for 24 hours (+20°C).
5. Apply ArchiMetal to the blade of the stainless-steel trowel and lightly dab it onto the surface. abstract way for 2 m<sup>2</sup>, lightly smooth the product while still fresh to create the desired texture, the more you press the product the wider the texture will be

# MARMOMETAL

6. Allow the product to dry for 24 hours (+20°C).
7. Using an electric polisher connected to a vacuum cleaner, apply the 1000-grit silicon carbide polishing disc and polish the entire surface.
8. Polish the surface again as before, but replace the silicon carbide polishing disc with a 3000-grit disc.
9. Apply a generous coat of ProteKto EcoSilan using a short-haired Mohair roller.
10. Allow it to dry for 24 hours (+20°C).
11. Polish the surface again as before, using the silicon carbide polishing disc and a 3000-grit disc.

## TECHNICAL DATA

Consult the Marblex Mirror and ArchiMetal technical data sheets.

## OTHER INFORMATION

- ✓ It is recommended to avoid direct contact with highly aggressive substances, such as strongly acidic or basic substances and strongly oxidizing substances (e.g., hair dyes), which can alter the color of the flooring.
- ✓ Plastics Vulcanized materials with a high plasticizer content (e.g., tires) may mark the floor if left in prolonged contact.
- ✓ The photographic images in the catalog and on the website, as well as the colors shown in the samples, are purely indicative.
- ✓ Use materials from a single production batch for each project.

## MAIN CHARACTERISTICS

- ✓ Store in a dry, dry place, away from sunlight.
- ✓ Do not apply on dusty surfaces.
- ✓ Do not apply on wet surfaces.
- ✓ Do not apply on frozen surfaces.
- ✓ Do not apply on still-damp surfaces and repairs.
- ✓ Do not apply in strong sunlight (outdoor application).
- ✓ Do not apply in strong winds (outdoor application).
- ✓ Do not apply in rain (outdoor application).
- ✓ Make sure the temperature does not drop below +10°C before application.
- ✓ Do not apply where rising or seeping damp has been detected.
- ✓ Consult the local weather forecast (outdoor application).
- ✓ Properly cover fixtures, doors, etc. before application. Application

## WARNINGS

- ✓ Product for professional use; comply with national standards and regulations.
- ✓ Apply when the substrate temperature is above +10°C.
- ✓ Apply to permanently dry substrates.
- ✓ Protect from direct sunlight and drafts for the first 6 hours.
- ✓ Do not apply to dirty or loose surfaces.
- ✓ Dispose of in accordance with applicable regulations.
- ✓ Materials exposed to temperature changes (due to transportation, storage, construction site, etc.) may cause substantial changes to the product (e.g., crystallization, partial hardening, fluidification, accelerated or delayed curing).

# MARMOMETAL

- ✓ In most cases, restoring the products to optimal conditions will restore their original characteristics.
- ✓ Protect surfaces and objects in the installation area from accidental contact.
- ✓ If necessary, request the safety data sheet or contact Nikkolor Italia Technical Customer Service at +39 333 861 8963.
- ✓ [www.nikkolor.net](http://www.nikkolor.net)

Data measured at +20°C, 65% RH, and no ventilation. They may vary depending on specific construction site conditions: temperature, ventilation, and substrate absorbency. This information is current as of January 2026 and may be subject to additions and/or changes over time by Nikkolor Italia s.r.l. For any such updates, please consult the website [www.nikkolor.net](http://www.nikkolor.net).

Nikkolor Italia s.r.l. is therefore responsible for the validity, timeliness, and up-to-dateness of its information only if taken directly from its website. The technical data sheet is compiled to the best of our technical and application knowledge. However, since we cannot directly influence site conditions and the execution of the work, it represents general information that does not bind our company in any way. Therefore, we recommend a preliminary test to verify the product's suitability for the intended use.

**P.S. To create MarmoMetal Inciso and MarmoMetal Fusion, participation in one of our Master Training Courses is required.**

