

EMOTIONS

Issued on 12/03/2013 - Rev. No. 1 of 05/09/2023

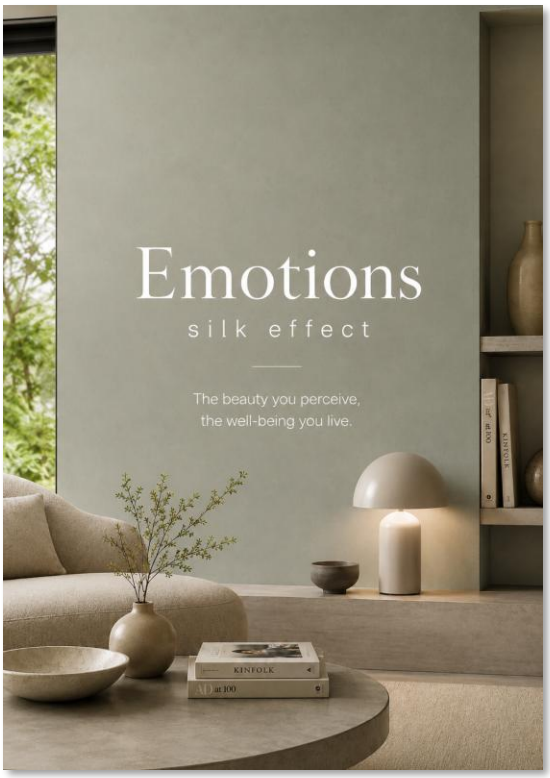

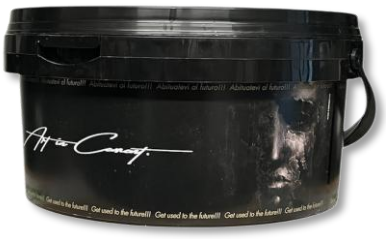

EMOTIONS


MINERAL DECORATIVE COATING
VELVET EFFECT SOFT TOUCH

A MATERIAL YOU CAN FEEL. ELEGANCE YOU CAN LIVE.


Emotions is a matte decorative coating that enhances surfaces with a soft, three-dimensional feel and a refined velvet effect. Bold design. Unique sensation.



ELEGANT OPEN SPACE
Seamless surfaces without joints for modern interiors and great design.

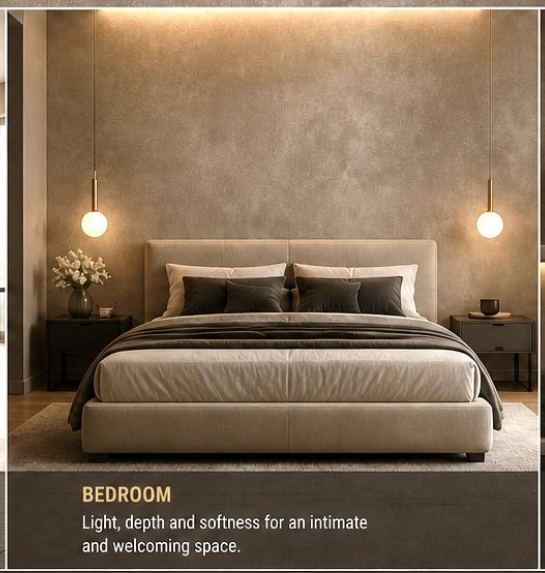

BEDROOM
Light, depth and softness for an intimate and welcoming space.

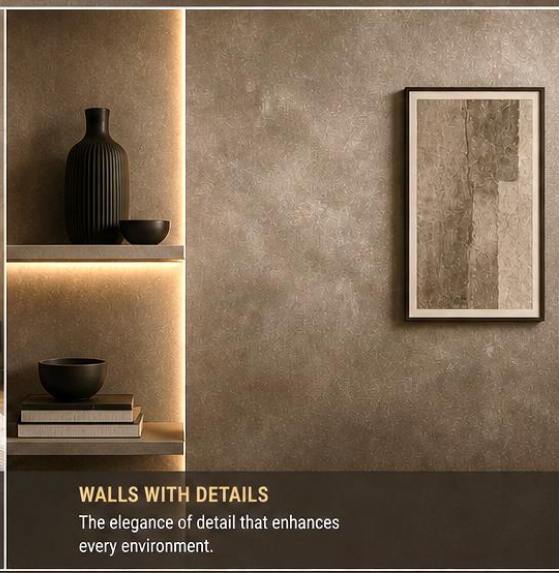

WALLS WITH DETAILS
The elegance of detail that enhances every environment.

VELVET EFFECT SOFT TOUCH | TWO-COAT APPLICATION | BREATHABLE AND MINERAL | RESISTANT TO MOLD AND BACTERIA | NO ADDED FORMALDEHYDE* AND NO APEO** | 32 COLORS TO TONE

NIKKOLOR® ITALIA
www.nikkolor.net

EMOTIONS

DESCRIPTION
Unique lines with a bold and elegant character, unmistakable in its architectural precision, the new Emotions finish comes to life and displays all its splendor in the exceptional and unique nature of its incredible architectural applications, ranging from the most exclusive and sophisticated designs.

COMPOSITION
- ✓ Special acrylic emulsion, a blend of natural biostable micas, ceramic microspheres, various pigments, and additives
- ✓ Matte, non-toxic, non-yellowing decorative wall coating, permeable to water vapor, scented upon application, resistant to fungi and bacteria, it is an environmentally sustainable and advanced product, containing no added *Formaldehyde or **APEO, and with a very low VOC content.

FIELDS OF USE
- ✓ Ideal for covering interior walls and ceilings intended for high-end design and for the renovation of public and private spaces, shopping centers, shops, bars, villas, and residences.
- ✓ The unique feature of the total absence of joints allows for seamless solutions, a true innovation in modern architecture, a refined finish capable of creating a velvet effect, giving three-dimensionality to the surfaces it covers, and a soft, smooth touch.

SUBSTRATE PREPARATION AND APPLICATION
- ✓ Substrates must be dry, solid, and free of dust, paint, wax, oil, and loose particles.

1. Apply a single coat of Primer NK evenly over the entire surface to be treated using a short-haired roller and a brush.
2. Let dry for 24 hours (+20°C).
3. Apply a first coat of Emotions using a stainless-steel trowel, evenly over the entire surface.
4. Let dry for 8 hours (+20°C).
5. Apply a second coat of Emotions over approximately 3 m2, work backwards and use crisscross, staggered movements to design the surface.
6. Let dry for at least 12 hours (+20°C).

TECHNICAL DATA
- ✓ Appearance at +23°C: Creamy.
- ✓ Specific weight: 0.700 kg/L. +/- 5%
- ✓ Composition: Acrylic emulsion, mix of natural biostable micas, ceramic microspheres, additives
- ✓ Base colors: Silver, White, Oro Ducale, Aluminum
- ✓ Colors obtainable with toner: 16 shades
- ✓ Viscosity at +23°C: ≈ Thixotropic
- ✓ pH: > 9.00
- ✓ VOC classification: 8.6 g/l
- ✓ Coverage: 10 m^2/L in two coats, depending on substrate absorption
- ✓ Dilution: Ready to use
- ✓ Operating temperature: +10°C and +30°C.

EMOTIONS

- ✓ Drying time: Touch dry in 2 hours, thoroughly dry in 24 hours at 20°C
- ✓ Application: Stainless steel trowel, plastic trowel, brush, and spalter
- ✓ Cleaning tools after use: Water
- ✓ Packaging: 2.5 liters
- ✓ Cleaning instructions: Clean with a damp microfiber cloth
- ✓ Storage: In tightly closed original packaging and in a dry place between +5°C and +30°C
- ✓ Washing resistance: Resistant to washing > 5000 cycles Gadner UNI 10795 UNI 10560
- ✓ Water vapor permeability: High UNI 10795 UNI EN ISO 7783-2
- ✓ Safety information: Please refer to the latest Safety Data Sheet (SDS) for hazard classification, precautions for use, and personal protective equipment (PPE).

MAIN CHARACTERISTICS

- ✓ Store in a dry, dry place, away from sunlight.
- ✓ Do not apply on dusty surfaces.
- ✓ Do not apply on wet surfaces.
- ✓ Do not apply on frozen surfaces.
- ✓ Do not apply on still-damp surfaces and repairs.
- ✓ Do not apply in strong sunlight (outdoor application).
- ✓ Do not apply in strong wind (outdoor application).
- ✓ Do not apply in rain (outdoor application).
- ✓ Make sure the temperature does not drop below +10°C before application. Application
- ✓ Do not apply where rising or infiltrating damp has been confirmed.
- ✓ Consult the local weather forecast (outdoor application).
- ✓ Properly cover fixtures, doors, etc. before application.

WARNINGS

- ✓ Product for professional use; comply with national standards and regulations.
- ✓ Apply when the surface temperature is above +10°C.
- ✓ Apply to permanently dry surfaces.
- ✓ Protect from direct sunlight and drafts for the first 6 hours.
- ✓ Do not apply to dirty or loose surfaces.
- ✓ Dispose of in accordance with applicable regulations.
- ✓ Materials exposed to temperature changes (due to transportation, storage, construction site, etc.) may cause substantial changes to the product (e.g., crystallization, partial hardening, fluidification, accelerated or delayed curing).
- ✓ In most cases, restoring the products to optimal conditions will also restore their original characteristics.
- ✓ Protect surfaces and objects in the installation area from accidental contact.
- ✓ If necessary, request the safety data sheet or contact Nikkolor Italia Technical Customer Service at +39 333 861 8963
- ✓ www.nikkolor.net

EMOTIONS

Data measured at +20°C, 65% RH, and no ventilation.

They may vary depending on specific construction site conditions: temperature, ventilation, and substrate absorbency.

This information may be supplemented and/or modified over time by Nikkolor Italia s.r.l.; for any such updates, please consult the website www.nikkolor.net.

Nikkolor Italia s.r.l. is therefore responsible for the validity, timeliness, and up-to-dateness of its information only if taken directly from its website.

The technical data sheet is prepared based on our best technical and application knowledge.

However, since we cannot directly influence construction site conditions and the execution of the work, these guidelines represent general guidelines that do not bind our company in any way.

Therefore, we recommend a preliminary test to verify the product's suitability for the intended use.





Nikkolor Italia s.r.l.
V.le Vittorio Veneto, 186 - 96014 Floridia (SR)
+39 0931 941789 - www.nikkolor.net