
PERLA D'ORIENTE

Issued on 12/03/2013 - Rev. No. 1 of 05/09/2023



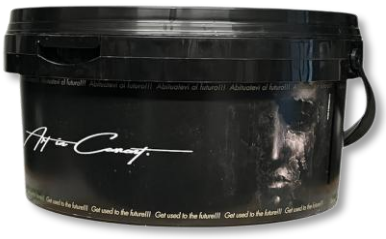

PERLA D'ORIENTE

PEARLESCENT SAND EFFECT DECORATIVE COATING

INSTANT WOW EFFECT.
NO COMPROMISES.

Turn any wall into a high-end design surface.
Perla d'Oriente creates luminous reflections and refined depth with an easy and fast application.

MORE PERCEIVED VALUE. | **MORE VISUAL IMPACT.** | **MORE DIFFERENCE.**
Than any traditional paint.

MORE PERCEIVED VALUE.
Increases the value of any environment.

MORE VISUAL IMPACT.
Luminous reflections that catch the eye.

MORE DIFFERENCE.
Choose a unique style, not just any paint.



ELEGANT OPEN SPACE
More light, more space, more impact.



BEDROOM
Visual comfort and refined atmosphere.



KITCHEN
Modern design even in high-traffic areas.



ENTRYWAY
Strikes immediately. Stays in memory.



WALL WITH DETAILS
Pearlescent texture that enhances every project.

PEARLESCENT SAND EFFECT
Refined reflections and elegant depth.

EASY AND FAST APPLICATION
Simple to apply, professional result.

SEAMLESS SURFACES NO JOINTS
Uniform solution for a perfect finish.

BREATHABLE AND MINERAL
Allows walls to breathe, ideal for any environment.

RESISTANT TO MOLD AND BACTERIA
Effective protection over time.

LOW VOC CONTENT
Respects the environment and your health.

FORMALDEHYDE FREE
Safe for you, safe for others.

32 COLORS TINTABLE
Wide range of colors for every style.

PERLA D'ORIENTE

DESCRIPTION
The quintessential sandblasted series, Perla d'Oriente transforms into haute couture for design, a dream come true. A line of pearly metallic effects, a symphony of lights that dress the essence of elegance and illuminate its nuances with an enchanting effect. Water, its secret formula, a harmony with the environment, a respectful choice, low VOC content, air quality thanks you, and the protection of installers is guaranteed. Formaldehyde, banished from this marvel, a safe work for those who love purity. Colors that resist time and sunlight, the vibrant finish remains intact, without veils.

COMPOSITION
- ✓ Special resin emulsion, a mix of natural biostable micas, crystal microspheres, pigments, and additives; which make Perla d'Oriente a sandblasted decorative finish, quick and easy to apply, non-toxic, non-yellowing, permeable to water vapor, and resistant to fungi and bacteria.
- ✓ Perla d'Oriente is an environmentally sustainable and advanced product, containing no added *Formaldehyde or **APEO, and with a very low VOC content.

FIELDS OF USE
- ✓ Ideal for covering interior walls and ceilings intended for high-end design and for the renovation of public and private spaces, shopping centers, shops, bars, villas, and residences.
- ✓ The unique feature of the total absence of joints allows for seamless solutions, a true innovation in modern architecture. A refined finish capable of creating a velvet effect, giving three-dimensionality to the surfaces it covers, with a soft, smooth touch.

SUBSTRATE PREPARATION
- ✓ Substrates must be dry, solid, and free of dust, paint, wax, oil, and loose particles.

APPLICATION
1. Apply a single coat of Primer NK evenly over the entire surface to be coated. Treat using a short-haired roller and a brush.
2. Let dry for 12 hours (+20°C).
3. Apply a single coat of Perla d'Oriente using a spalter brush, using crisscrossing movements over the entire surface to be treated.
4. Let dry for 24 hours (+20°C).

TECHNICAL DATA
- ✓ Appearance at +23°C: Creamy
- ✓ Specific weight: 1.100 ± 5% kg/L.
- ✓ Composition: Resin emulsion, mix of natural biostable micas, crystal microspheres, various additives.
- ✓ Base colors: Silver, White Pearl, Oro Ducale, Aluminum, Platinum.
- ✓ Colors obtainable with toner: 32 shades.
- ✓ Viscosity at +23°C: ≈ 4300 cps ± 5% G6 RPM 100 at 25°C.
- ✓ pH: > 9.00
- ✓ VOC classification: 8.6 g/l
- ✓ Coverage: 12 m^2/L in two coats, depending on substrate absorption

PERLA D’ORIENTE

- ✓ Dilution: Ready to use
- ✓ Use temperature: +10°C and +35°C.
- ✓ Drying: Touch dry 1 hour, thoroughly dry 24 hours at 20°C
- ✓ Application: Spalter brush, roller, and stainless-steel trowel
- ✓ Tool cleaning: Water
- ✓ Packaging: 2.5 liters
- ✓ Cleaning instructions: Clean with a damp microfiber cloth
- ✓ Storage: In tightly closed original packaging and in a dry place between +5°C and +30°C
- ✓ Washing resistance: Resistant to washing > 30,000 cycles Gadner UNI 10795 UNI 10560
- ✓ Water vapor permeability: High UNI 10795 UNI EN ISO 7783-2
- ✓ Alkali resistance: UNI 10795
- ✓ Dirt pick-up: Low UNI EN 10792
- ✓ Safety information: Please refer to the latest Safety Data Sheet (SDS) for hazard classification, precautions for use, and personal protective equipment (PPE).

MAIN CHARACTERISTICS

- ✓ Store in a dry, dry place, away from sunlight.
- ✓ Do not apply to dusty surfaces.
- ✓ Do not apply to wet surfaces.
- ✓ Do not apply to frozen surfaces.
- ✓ Do not apply to still-damp surfaces and repairs.
- ✓ Do not apply in strong sunlight (outdoor application).
- ✓ Do not apply in strong winds (outdoor application).
- ✓ Do not apply in rain (outdoor application).
- ✓ Make sure the temperature does not drop below +10°C before application.
- ✓ Do not apply where rising or seeping damp has been detected.
- ✓ Consult the local weather forecast (outdoor application).
- ✓ Properly cover fixtures, doors, etc. before application. Application

WARNINGS

- ✓ Product for professional use; comply with national standards and regulations.
- ✓ Apply when the substrate temperature is above +10°C.
- ✓ Apply to permanently dry substrates.
- ✓ Protect from direct sunlight and drafts for the first 6 hours.
- ✓ Do not apply to dirty or loose surfaces.
- ✓ Dispose of in accordance with applicable regulations.
- ✓ Materials exposed to temperature changes (due to transportation, storage, construction site, etc.) may cause substantial changes to the product (e.g., crystallization, partial hardening, fluidification, accelerated or delayed curing).
- ✓ In most cases, restoring the products to optimal conditions will restore their original characteristics.
- ✓ Protect surfaces and objects in the installation area from accidental contact.
- ✓ If necessary, request the safety data sheet or contact Nikkolor Italia Technical Customer Service at +39 333 861 8963.
- ✓ www.nikkolor.net

PERLA D’ORIENTE

Data measured at +20°C, 65% RH, and no ventilation. They may vary depending on specific construction site conditions: temperature, ventilation, and substrate absorbency.

This information may be supplemented and/or modified over time by Nikkolor Italia s.r.l.; for any such updates, please consult the website www.nikkolor.net.

Nikkolor Italia s.r.l. is therefore responsible for the validity, timeliness, and up-to-dateness of its information only if taken directly from its website. The technical data sheet is prepared based on our best technical and application knowledge.

However, since we cannot directly influence site conditions and the execution of work, it represents general information that does not bind our company in any way.

Therefore, we recommend a preliminary test to verify the product's suitability for the intended use.





Nikkolor Italia s.r.l.
V.le Vittorio Veneto, 186 - 96014 Floridia (SR)
+39 0931 941789 - www.nikkolor.net